





JCB Hydradig 110W 10.5 Ton Rubber Duck

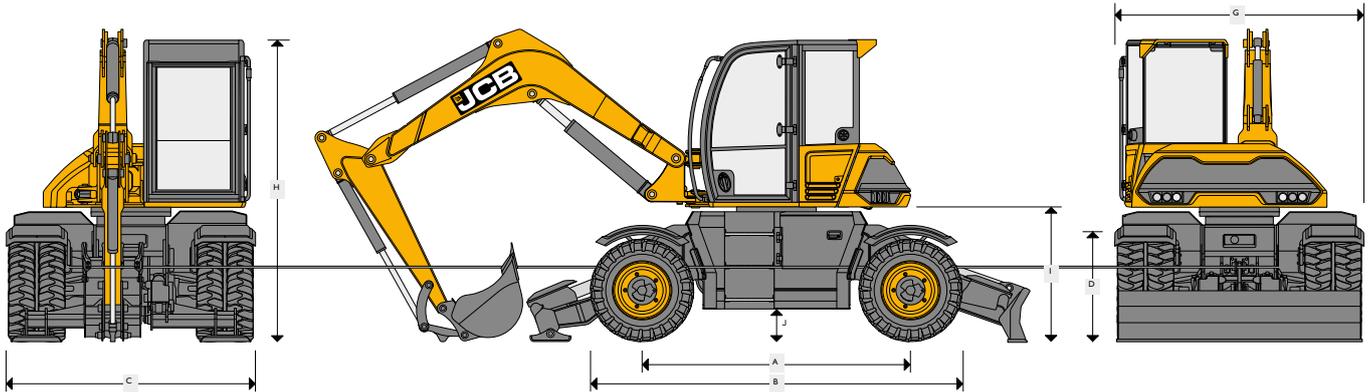

A	Wheelbase	mm	2650	G	Transport width	mm	2440
B	Length over tyres	mm	3689	H	Height over cab	mm	2988
C	Width over tyres	mm	2420	I	Clearance under counterweight	mm	1319
D	Height over tyres	mm	1016	J	Ground clearance	mm	298

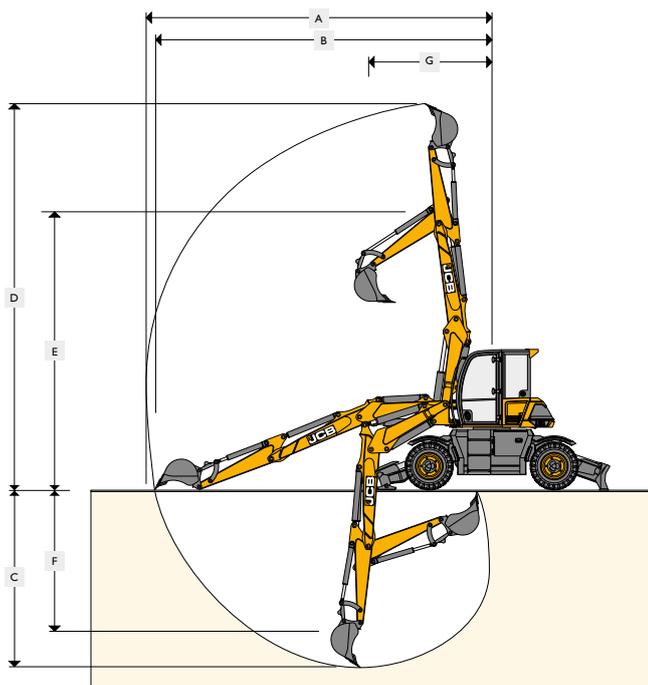

WORKING RANGE – TAB

Dipper length		1.65m	2.0m	2.25m
A	Max digging reach	mm 7420	7770	8020
B	Max digging reach (on ground)	mm 7165	7530	7785
C	Max digging depth	mm 3810	4160	4410
D	Max digging height	mm 8195	8545	8795
E	Max loadover height	mm 6380	6720	6965
F	Max vertical wall cut depth	mm 3000	3315	3540
G	Min swing radius	mm 2675	2920	3100
	Boom swing left	degrees	50	
	Boom swing right	degrees	70	
	Bucket rotation	degrees	184	
	Dipper tearout	kNm	48.3	42.3
	Bucket tearout	kNm		60.2

WORKING RANGE – MONOBOOM

Dipper length		1.65m	2.0m	2.25m
A	Max digging reach	mm 6455	6785	7020
B	Max digging reach (on ground)	mm 6085	6445	6695
C	Max digging depth	mm 3370	3720	3970
D	Max digging height	mm 6445	6645	6790
E	Max loadover height	mm 4710	4915	5060
F	Max vertical wall cut depth	mm 1815	2135	2360
G	Min swing radius	mm 2645	2685	2715