

RIDGWAY Rentals

PLANT RENTAL • HAULAGE • SALES • PARTS • SERVICE

01691 770171 0800 515155

sales@ridgwayrentals.com www.ridgwayrentals.com



Komatsu WA430-6 Wheeled Loading Shovel


ENGINE POWER
13 kW / 232 HP @ 2.100rpm

OPERATING WEIGHT
19.100 - 20.395 kg

BUCKET CAPACITY
3,3 - 4,2 m³

FORK TINES

Sales code		C53
Fork tine length	mm	1.500
A Max. reach at ground level	mm	1.140
B Max. reach	mm	1.780
C Max. reach at max. stacking height	mm	865
a Max. height fork-carrier	mm	4.995
b Hinge pin height	mm	4.155
c Max. stacking height	mm	3.985
d Height of forks at maximum reach	mm	1.875
Max. tipping load, straight	kg	10.585
Max. tipping load, articulated	kg	9.512
Max. payload as per EN 474-3, 80%	kg	7.000
Max. payload as per EN 474-3, 60%	kg	5.720
Weight in working order with fork tines	kg	18.500

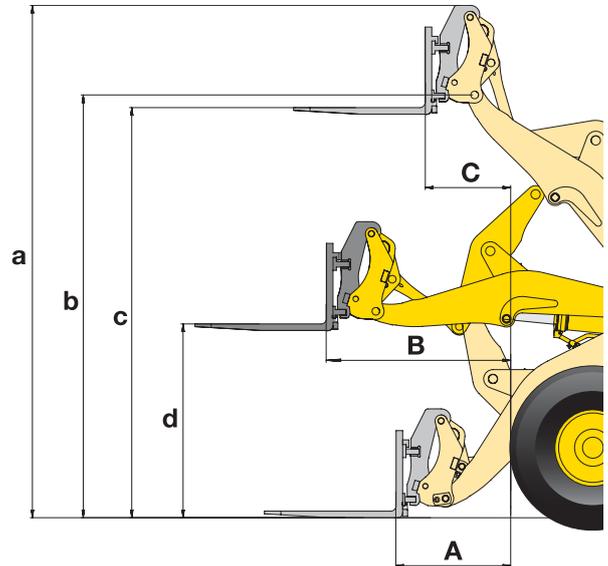

HIGH-DUMP BUCKET

Type		A	B
Sales code		Q39	Q41
Bucket capacity (heaped, ISO 7546)	m ³	6,5	5,2
Material density	t/m ³	0,8	1,0
Bucket width	mm	3.000	3.000
Bucket weight without teeth	kg	2.100	2.420
A Reach at 45°	mm	1.830	1.775
a Height top edge of bucket	mm	6.710	6.490
b Hinge pin height	mm	5.175	5.150
c Max. loading height at 45°	mm	4.990	4.970
d Dump height at 45°	mm	4.730	4.740

Type A: dump cylinders located inside bucket
Type B: dump cylinders located outside bucket

