

ELECTRIC ACCESS PLATFORMS | S1932E-S4550E



# HIGHER STANDARDS



PLATFORM HEIGHTS  
5.7m – 13.8m




# GREATER PRODUCTIVITY

Designed using 75 years of engineering expertise, the JCB Electric Scissor range is ideal for rental companies and contractors worldwide.



## HIGH PERFORMANCE


JCB's Electric Drive range uses world-class parts and materials, offering proven durability and up to 53% more runtime on a single battery charge.

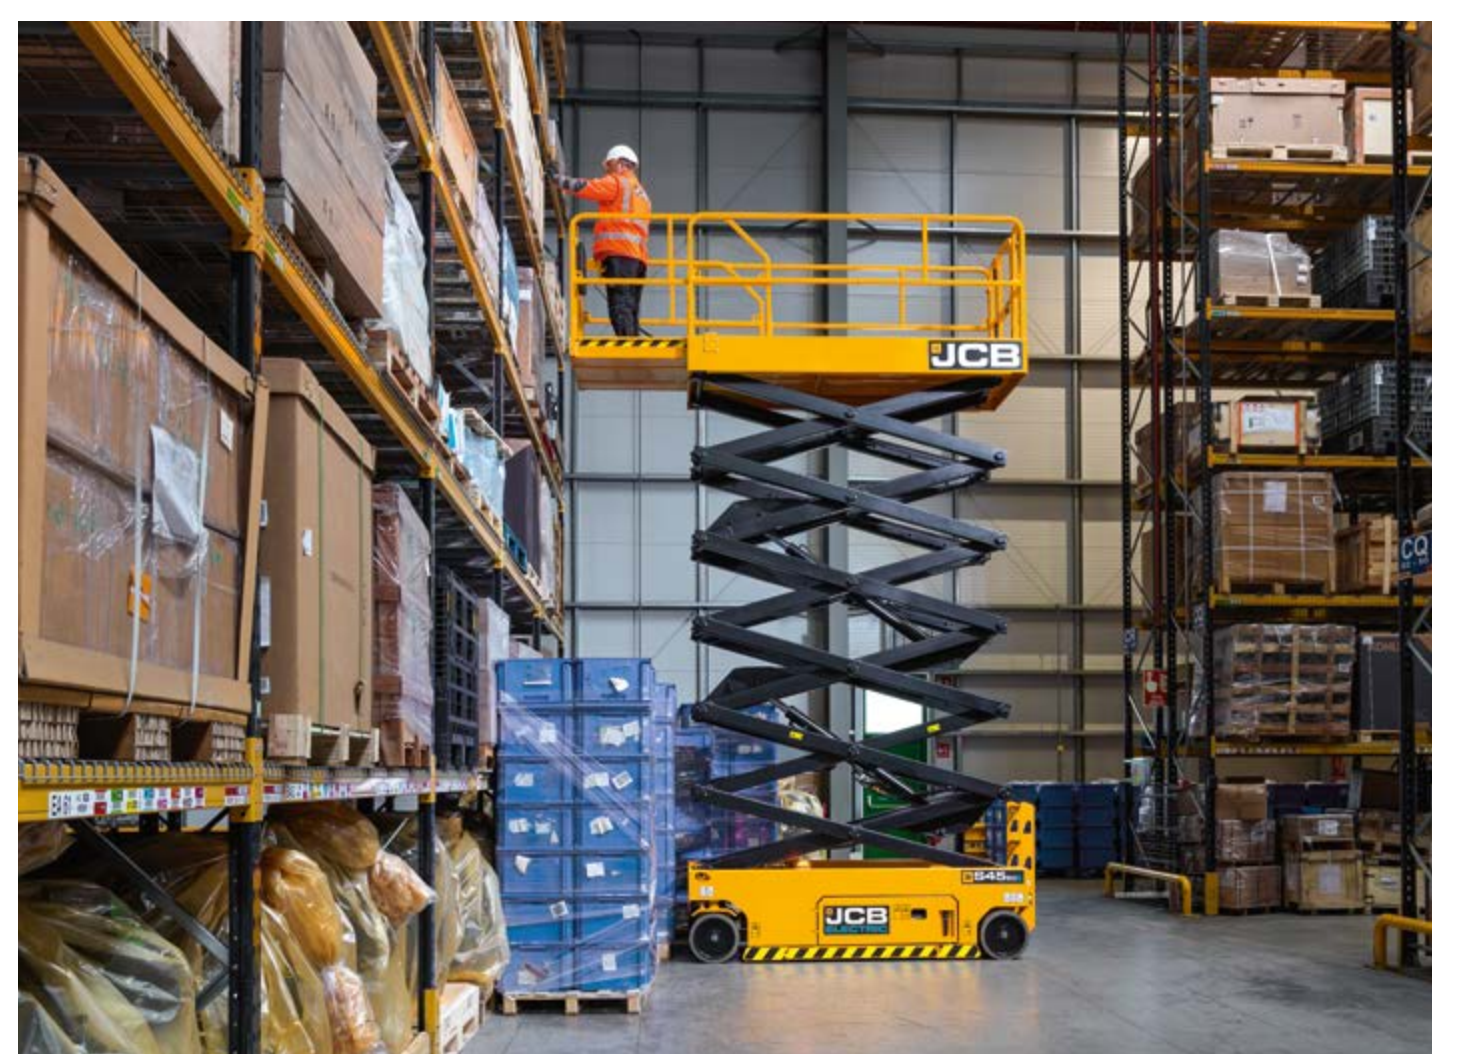



# BUILT TO LAST

Features such as motor protection plates, wear pads between scissor sections to stop metal-on-metal wear and warning light protection maximise uptime.

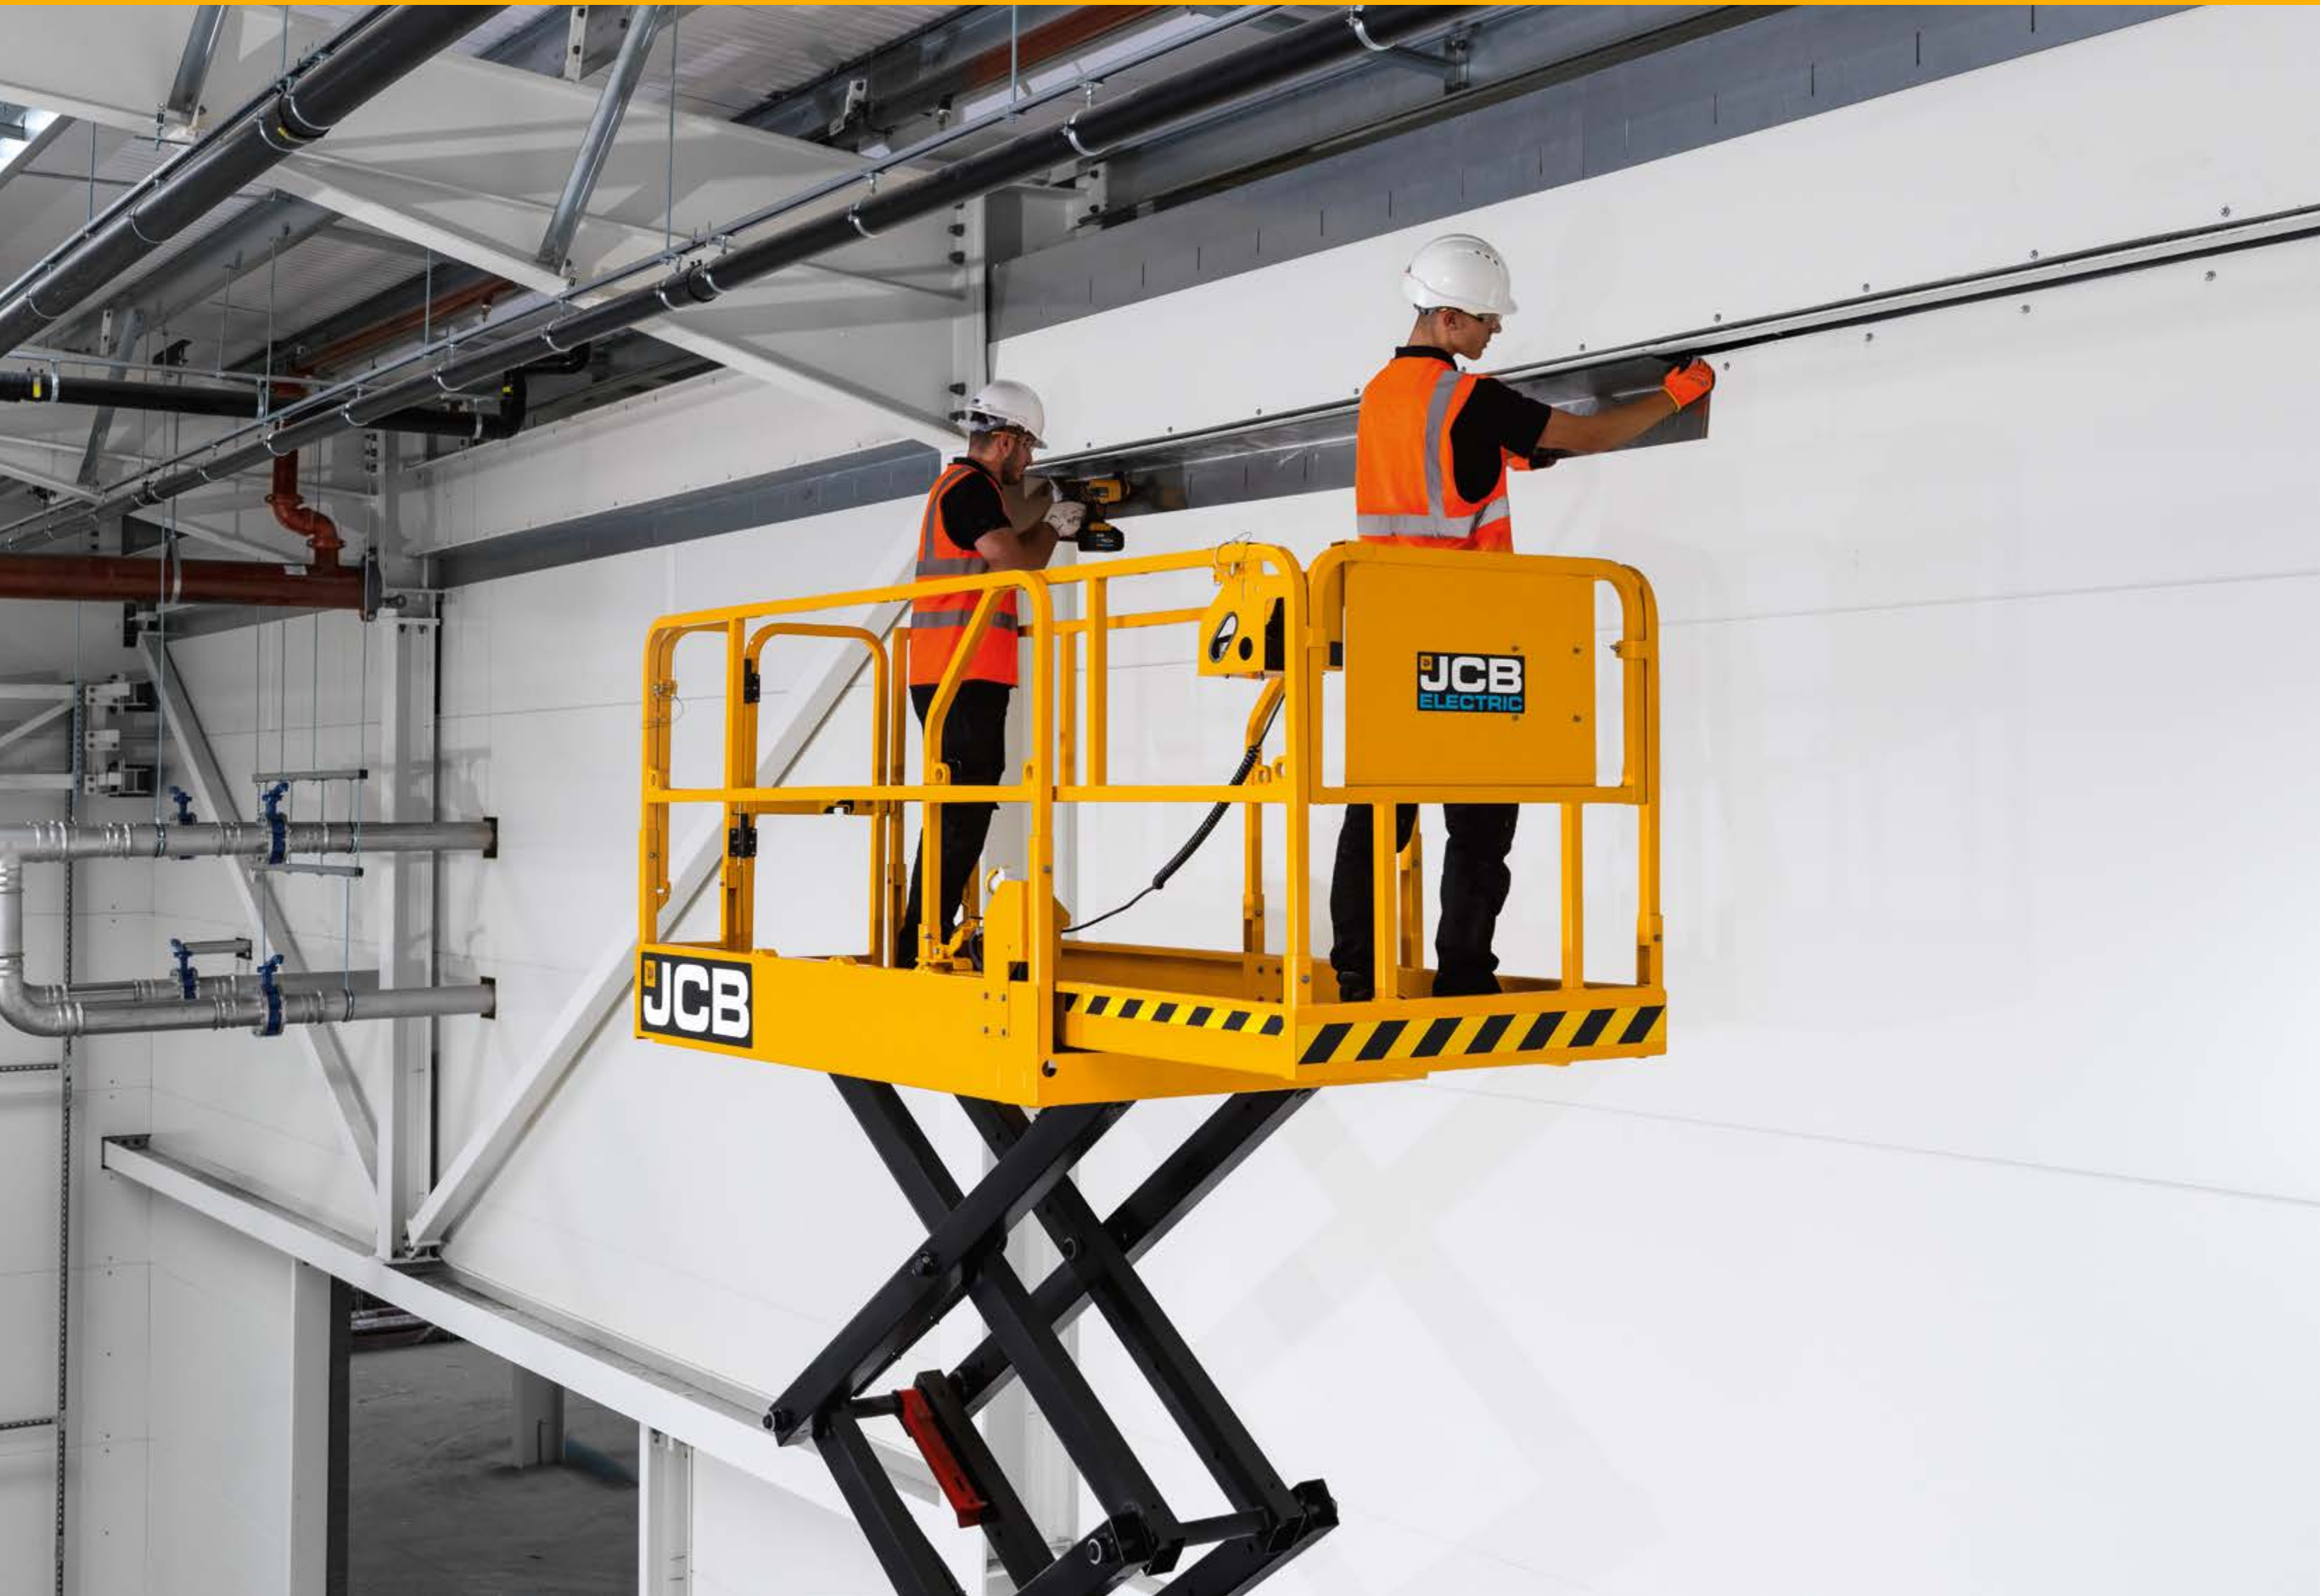

## UNIQUE DESIGN

EPD paint protection prevents corrosion. Full-size pivot bosses and our scissor pack design enable market-leading stability at height.




# OPERATOR FRIENDLY MACHINES

Roller design and a foot pedal allow easy extension and retraction, even at height. Rapid Field Calibration enables on-site recalibration in under 4 minutes.



## EASY TO WORK

A controller cradle and front chassis winch point allow for easy manoeuvring. The SI932E machine provides the option to have folding rails flush with the platform.

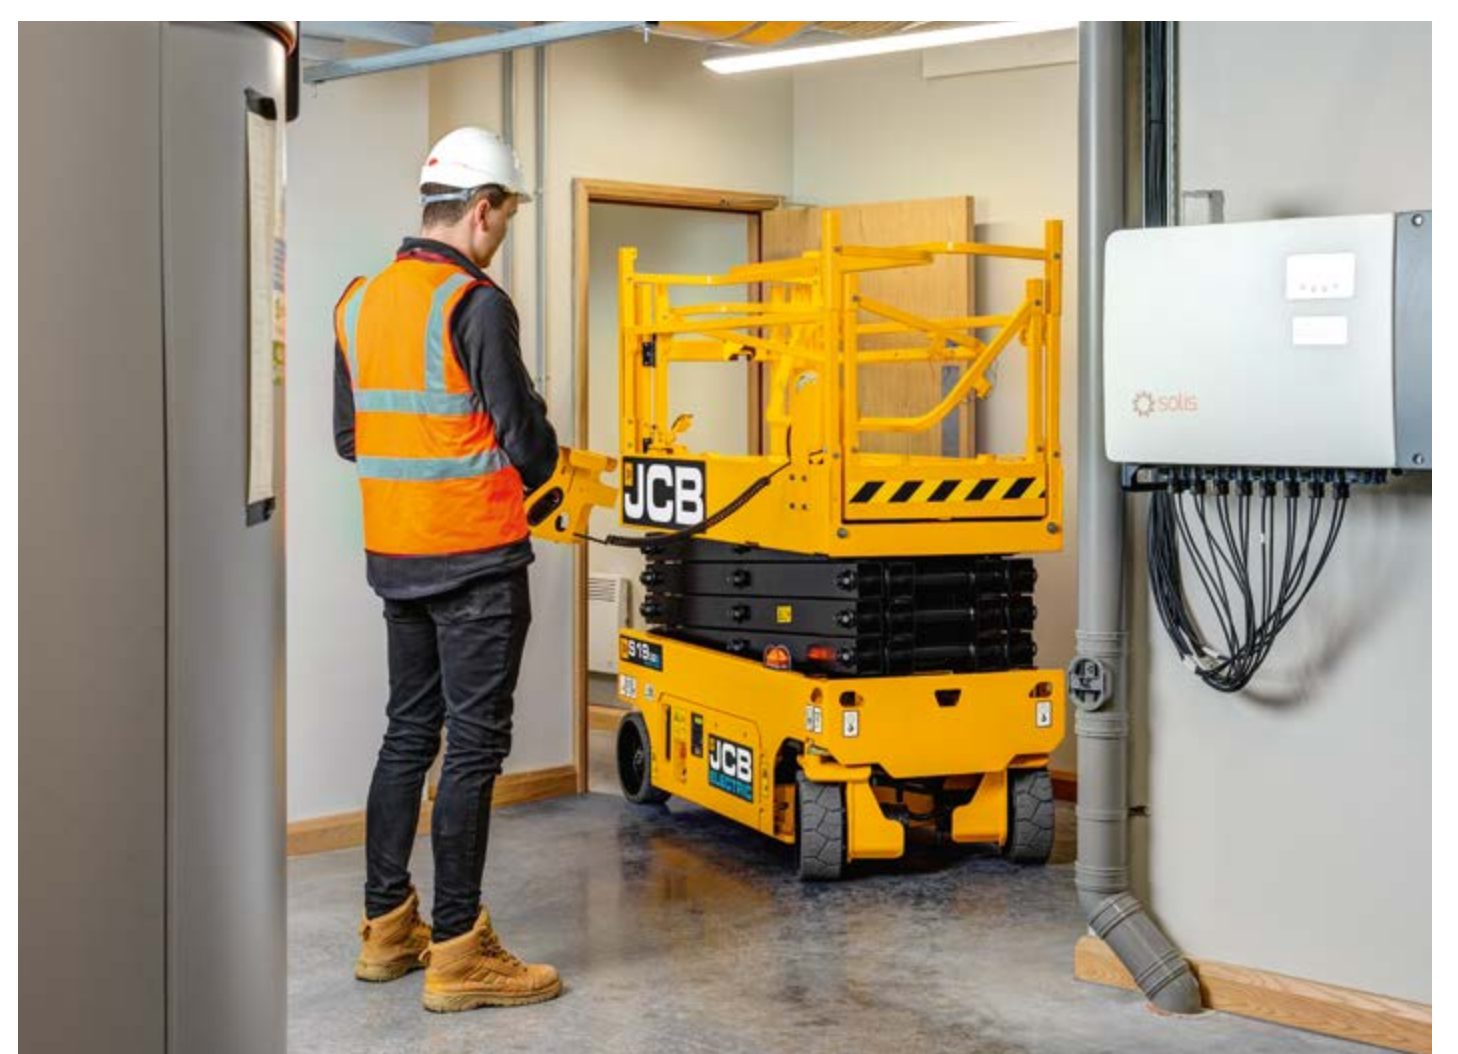



# SAFETY FIRST

The pothole protection system is a key feature of the safety system, ensuring the machine only raises when it is fully deployed.



## GREATER CONTROL

Fully proportional raise and drive controls with creep speed mode allows for precise machine movement at height.



# INDUSTRY-LEADING SUPPORT

The optional JCB LiveLink® telematics system provides real-time information, allowing you to manage a single machine or an entire fleet with ease.




## SAME DAY SUPPORT

Access same-day genuine JCB parts and fully trained engineers for ultimate peace of mind.





# ELECTRIC ACCESS PLATFORMS | S1932E-S4550E

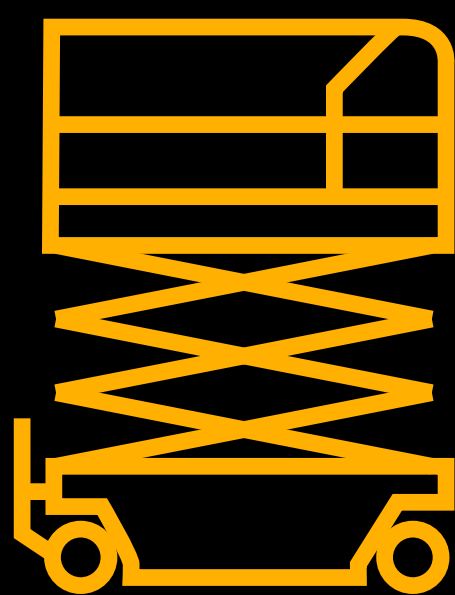

## SPECIFICATION

|   |  |
|---|--|
| ELECTRIC DRIVE MODELS                     | S1932E, S2632E, S2646E, S3246E, S4046E, S4550E |
| Max platform height                       | 5.71m – 13.8m                                  |
| Extension outreach                        | 0.9m   |
| Overall length (stowed)                   | 1.78m – 2.76m                                  |
| Overall width (stowed)                    | 0.82m – 1.27m                                  |
| Overall height (stowed, guardrail folded) | 1.85m – 2.20m                                  |
| Overall weight                            | 1,590kg – 3,538kg                              |
| HIRD cycle                                | 30.5m  |



## STANDARD FEATURES

- Ergonomic controller cradle
- Pothole protection struts
- Industry standard componentry
- Power outlet in the basket
- Front winch point
- Non-marking tyres
- 2-wheel drive (front)
- Easy to view charge indicator
- Ergonomic door handle design
- High quality JCB parts





**SCISSOR LIFTS**  
**100% ELECTRIC, ZERO EMISSIONS**

**HIGHER STANDARDS**

**FIND OUT MORE**



[www.jcb.com/electric](http://www.jcb.com/electric)